


CNC Multi Slide



# NUMAC-NUMAFLEX

Wire, Tube, Strip

> 2 to 10 mm - 600 N/mm<sup>2</sup>  
> .08 to .4" - 85 Ksi

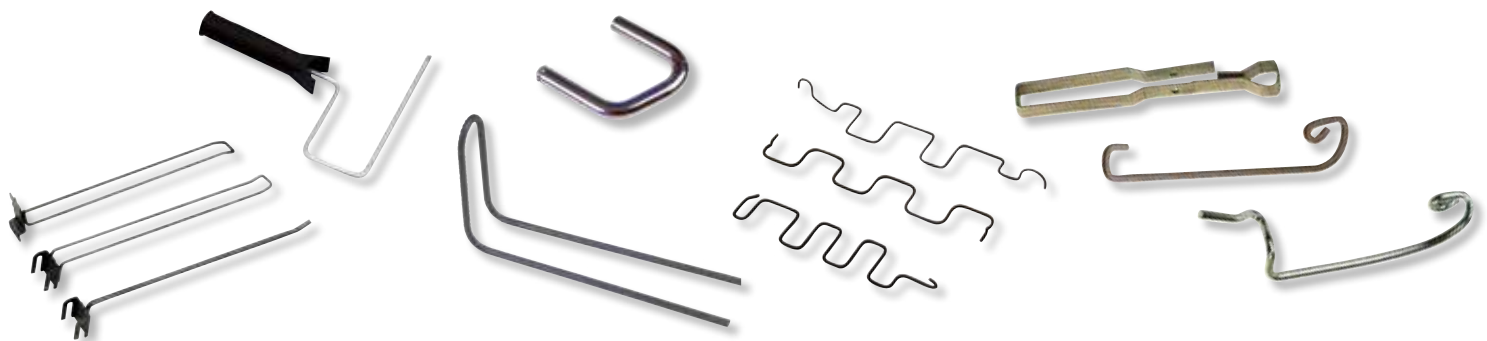

 NUMALLIANCE

Revolutionizing CNC Technology for Wire,  
Tube and Strip Forming Machinery

# CNC Multi Slide

Wire, Tube, Strip

# NUMAC-NUMAFLEX



Swaging



Chamfer in line



Threading



Turning



Coining



Welding

## Main Features

- > 2D or 3D bending from precut lengths or coil
- > Top production speed thanks to full tooling or partial tooling solutions
- > Suitable for medium to large size production runs
- > Quick production changeover (no cams + tooling preset on plates)
- > Easy integration of secondary processes (large bed table)
- > Multiple feed possible

## Numac

- > A full tooling solution provides top speed, top precision and top bending possibilities (i.e. not having the limitations of sequential bending like bend-in-bend, compound bend...)

## Numaflex

- > A single or double head bender is integrated in the Numac for reducing tool cost and adding flexibility. Possible configurations vary from full sequential bending to a mix tooling + sequential bending.

## Dimensions

- > 3600 to 5100 x 1400 x 2450 mm
- > 11.8 to 16.7 x 4.6 x 8'

## Net weight

- > 6000 to 12000 kg
- > 13000 to 26000 lbs

