

CNC Multi Slide



# NUMASLIDE

Wire  
Strip

> Ø 1 to 8 mm at 600N/mm<sup>2</sup> or Ø .04 to .315" at 85 KSI  
> On request



 NUMALLIANCE

Revolutionizing CNC Technology for Wire,  
Tube and Strip Forming Machinery

# CNC Multi Slide

# NUMASLIDE

Wire, Strip



Swaging



Chamfering



Threading



Turning



Coining



Welding



Flattening



Notching



Marking

	Numaslide 5	Numaslide 6	Numaslide 8
Wire capability at 600 N/mm <sup>2</sup> at 85 KSI	1 to 5 mm .04 to .20"	1 to 6 mm .04 to .236"	2 to 8 mm .08 to .325"
at 540N/mm <sup>2</sup> at 78 KSI		1 to 6.35 mm .04 to .25"	

## Main Features


- > 2D or 3D bending
- > From coil
- > Top production speed
- > No cams – only programmable servo motors
- > Quick tooling / production changeover
- > Simple tooling with quick attachment onto the machine slides
- > Motors mechanical protection
- > Cycle time optimization and tooling adjustment by easy programming on touch screen

## Dimensions

- > 3800 x 2200 x 1900 mm
- > 150 x 87 x 75"

## Weight

- > 6000 to 12000 kg
- > 13000 to 26000 lbs

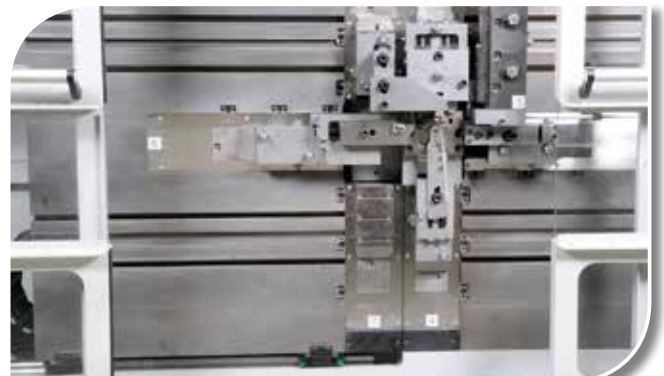

Parc d'Activités - F 88470 SAINT MICHEL SUR MEURTHE  
Tel. : +33 (0)3 29 58 36 15 - Fax : +33 (0)3 29 58 46 47  
mail : numalliance@numalliance.com

WWW.numalliance.com

FTECH-Numaslide-EN-18

www.dargdesign.com