

CNC Multi Slide Former

| CNC-16T1




| CNC-30T1



| CNC-45T3



Manufacture various stamping parts,
clips, clamps, wire forms...
with high speed, high precision

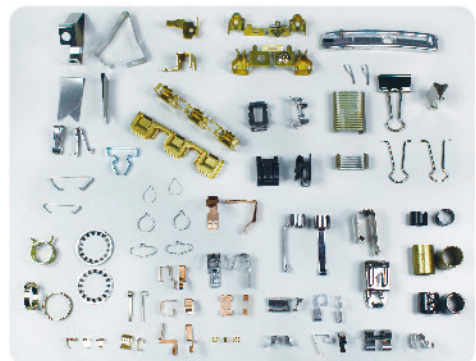

Features

- Max. 16 axes CNC controller.
- Schneider Electric motor + driver + wiring.
- Optional additional 35 - 55 tons press.
- Double cams slide.
- Custom made auto system for assembly, welding, tapping, milling is available.

CNC-16T1

Specification:

Model Number	CNC-16T1
Wire Diameter(mm)	ø0.2-1.6
Thickness of strip(mm)	0.1-0.9
Width of strip(mm)	20
Hardness of Wire(Carbon)	80C
Axes(2 or 3 axes is available)	1
Max. Production rate(pcs/min)	200pcs/min
Max. Feed length(mm)	Unlimited
Press capacity(ton)	5
Slide capacity (ton)	0.8
Press stroke(mm)	10
Slide stroke(mm)	25
Standard Slide Q'ty	6
feeding (gripper/roller)	Grip feed
Dimension(mm)	1520x800x1500
Weight(kgs)	800

CNC-30T1

Specification:

Model Number	CNC-30T1
Wire Diameter(mm)	ø0.6-3.0
Thickness of strip(mm)	0.3-1.5
Width of strip(mm)	30
Hardness of Wire(Carbon)	80C
Axes(2 or 3 axes is available)	1
Max. Production rate(pcs/min)	200pcs/min
Max. Feed length(mm)	Unlimited
Press capacity(ton)	10
Slide capacity (ton)	1.8
Press stroke(mm)	14
Slide stroke(mm)	37
Standard Slide Q'ty	5
feeding (gripper/roller)	Grip Feed
Dimension(mm)	1850x900x1880
Weight(kgs)	1350

*Schneider motor is optional for CNC-30T1

CNC-45T3

Specification:

Model Number	CNC-45T3
Wire Diameter(mm)	ø1.5-5.0
Thickness of strip(mm)	0.3-2.0
Width of strip(mm)	40 , Max. 55
Hardness of Wire(Carbon)	80C
Axes(1 or 2 axes is available)	3(Cam, punch, feed)
Max. Production rate(pcs/min)	150pcs/min
Max. Feed length(mm)	Unlimited
Press capacity(ton)	25
Slide capacity(ton)	6.5
Press stroke(mm)	14
Slide stroke(mm)	single cam 70mm double cam 65mm
Standard Slide Q'ty	6
feeding (gripper/roller)	Grip feed or Roller
Dimension(mm)	2910x1290x2260
Weight(kgs)	2660

- The specifications are subject to change without notice.

Optional Press



PASQUALI TRADING Srl

Via Luigi Manzoni, 74/E - 31015 Conegliano (TV)
 Phone +39 0438 430596 - Fax +39 0438 430700
 info@pasqualitrading.com - www.pasqualitrading.com